



Scrub and Recoat

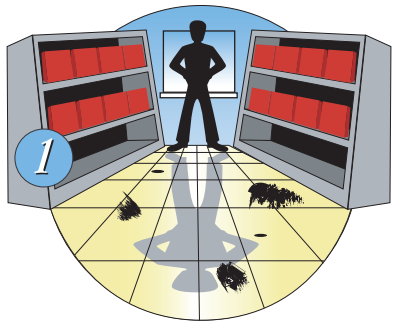


1 Check your floors regularly for a good base. In a well lit area, look straight down at the tile. If there's no depth to the finish and scruff and black marks are hard to remove, a recoat is due.

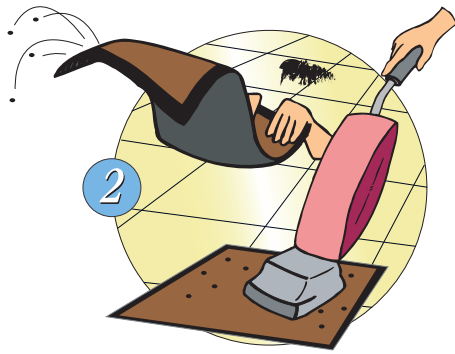

2 Vacuum or shake out all Walk Off Mats. Replace mats as needed. The more dirt you stop at the entrances, the longer the floor finishes will last and maintain a high appearance level.




3 Remove all portable displays and fixtures. Use a microfiber dust mop to remove all loose soil being sure to reach under counters.

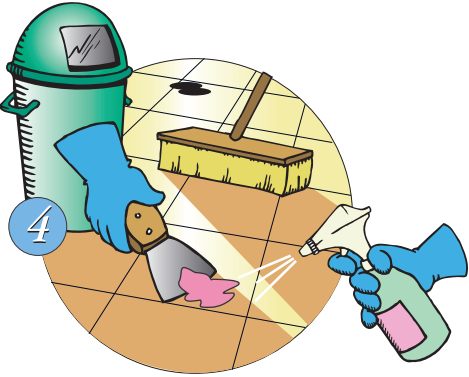

4 Use ECOSPHERE Bio Gel Graffiti Remover to remove gum and other attached soil deposits.



5 Check all equipment, making sure it is clean, and in running order. If not, clean and repair before using.

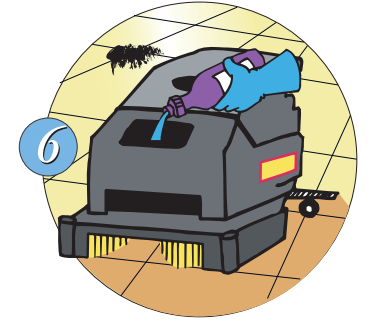

6 According to label directions, mix Cam Pro SB2 in solution tank.




7 Bring scrubber to where you will start. Scrub area slowly using full pad pressure, solution feed valve 3/4 open, squeegee down and vacuum motor on.



8 Pick up water missed by the scrubber with a wet/dry vac or mop and rinse the entire area with a clean rinse mop. As rinse water becomes dirty, change it.



9 If automatic scrubber is not available, liberally apply Cam Pro SB2 with a mop.

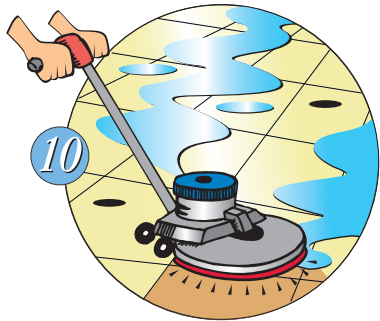

10 Bring scrubber to area you will start. Scrub with a hand scrubber equipped with a scrubbing pad.




11 Pick up solution with a wet/dry vacuum or mop. Rinse using a clean mop, changing water frequently.



12 Do one area at a time and never leave a wet area unattended.



13 Move to next area to be scrubbed and repeat steps 6-12.

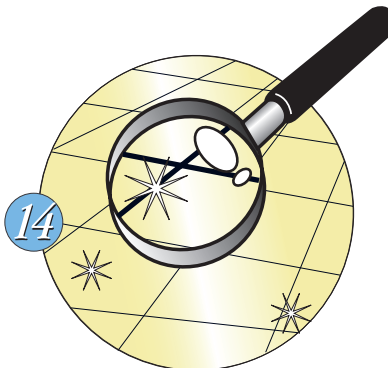


14 Inspect the floor and make sure it is clean. If not, rescrub and rinse until clean.



15 Recoat ONLY after scrubbing and rinsing. Make sure all dirt and black marks have been removed.



16 When floor has dried, apply 1 or 2 thin coats of Cam Pro Premier Floor Finish with a microfiber finish mop. Stay approximately 6 inches from edges.

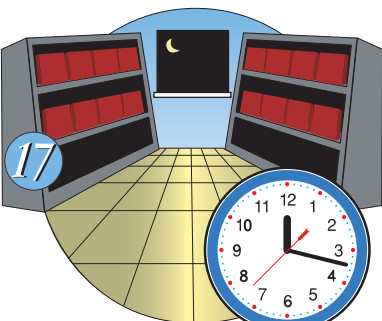

17 Allow approximately 24 hrs. cure before resuming daily maintenance procedures.



18 After all areas have been scrubbed and recoated, return all equipment to stop sink area for cleaning and storage.

Scrub & Recoat